







DUAL SWITCHES

Separately controlled

The spot- and floodlights are separately controlled.

LOCKOUT FUNCTION
AVOIDS ACCIDENTAL ACTIVATION

⊕ LOCK


Press and hold either of the two switches, or simultaneously press the two switches for 3 seconds.

⊕ UNLOCK

Simultaneously press the two switches for 3 seconds.





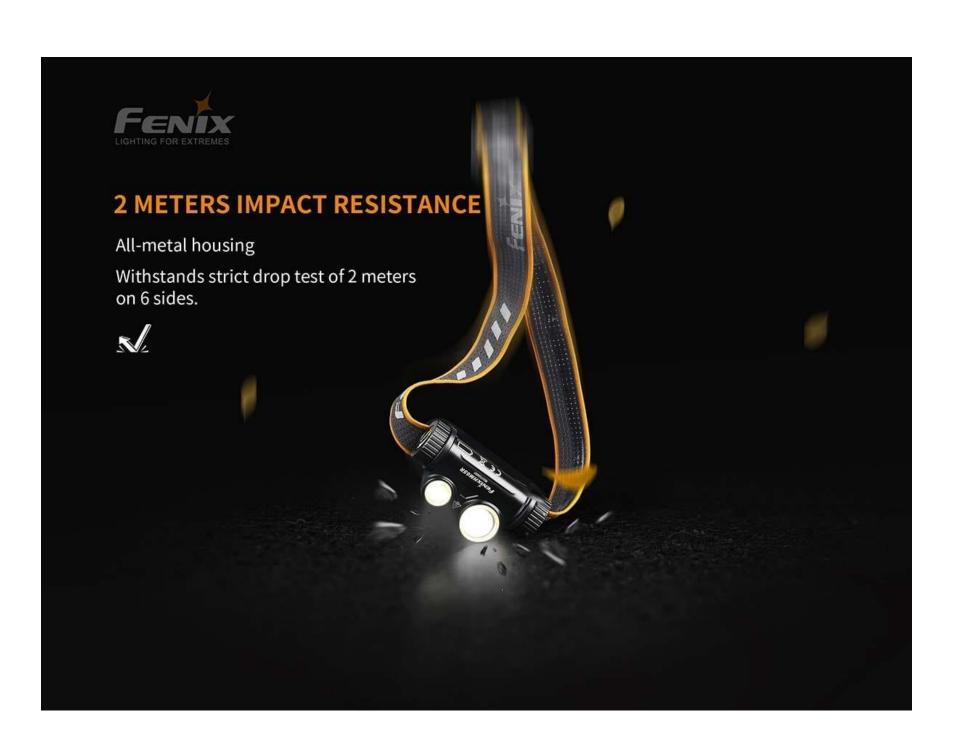



SPECIFICATIONS Size: 3.17" x 2.17" x 1.57" / 80.5 x 55x 40mm. Weight: 3.42oz / 97 grams (excluding battery).

ANSI/PLATO FL1	SPOTLIGHT MODE				FLOODLIGHT MODE		
	TURBO	HIGH	MED	LOW	HIGH	MED	LOW
少性 Output	1000 lumens	400 lumens	130 lumens	50 lumens	400 lumens	130 lumens	8 lumens
Q Runtime	2 hours	22 hours	48 hours	97 hours	21 hours	50 hours	300 hours
Distance	163 meters	101 meters	57 meters	37 meters	55 meters	30 meters	6 meters
Intensity	6677 candelas	2600 candelas	833 candelas	350 candelas	762 candelas	220 candelas	9 candelas
Impact Resistance	2 meters						
Waterproof Waterproof	IP68 , underwater 2 meters						

Note: The above specifications are the test results given by Fenix through its laboratory testing using Fenix ARB-L18-3500 battery under the temperature of $21\pm3^{\circ}$ C and humidity of 50% - 80%. The true performance of this product may vary according to different working environments and the actual batteries used.

*The Turbo output is measured in total of runtime including output at reduces levels due to temperature or protection mechanism in the design.





INCLUDED Package size:: 125×46×115mm



HM65R Headlamp



Headband Top headband



ARB-L18-3500 rechargeable Li-ion battery



USB Type-C charging cable



Headband mount



Spare O-ring



User manual



Warranty card

